

Clean - Efficient - Organized

Case Goods Solutions from STERIS



Warm, Secure & Organized

Amsco warming cabinets are designed to store and warm sterile intravenous (IV) and surgical irrigation solutions, linens, and blankets to programmed temperature settings for patient applications. Cabinets are available in:

- Standard or premium featured configurations
- Single- or dual-compartment models
- Glass or solid door versions
 - 18" (457 mm) or 24" (610 mm) depths
 - Mobile or fixed-based models, or OR storage console units
 - Freestanding or recessed installations



Standard glass door warming cabinet with optional mobile base



Standard solid door warming cabinet

Standard Model Configuration: Precise & Convenient Control

Our digital control technology offers:

- At-a-glance temperature reference
 - LED readout that verifies set-point and actual unit temperature
 - Individual LED readout for each compartment
- Accurate temperature control
 - Pre-set temperature range for IV solutions: 90-110° F (32.2-43.4°C), for single and upper compartment controls
 - Pre-set temperature range for irrigation solutions or blankets: 90-160° F (32.2-71.1 C)
 - Incremental temperature adjustment capability
 - Display shows either set-point or actual compartment temperatures in Fahrenheit or Centigrade
 - Enables user to match temperature instructions provided on solutions and to comply with hospital protocol
- Efficient heating
 - Visual indicator provides door ajar warning
 - Heating element interruption when door is ajar prevents accidental overheating of your supplies and saves on utility costs



Each compartment features an independent temperature control with pre-set buttons for IV temperature or IRR/blanket temperature.



Displays on dual compartment (top) and single compartment (above) can display temperature in F or C.

Tough as Steel

Our freestanding and recessed warming cabinets feature:

- Superior durability – cabinets are built to withstand years of use
 - Stainless steel interior cabinets
 - Optional tempered dual-pane glass doors
- Superior reliability –
 - Premium quality fan motors offer the highest level of performance

Inventory at a Glance

Amsco Glass Door Warming Cabinets offer:

- Increased productivity due to improved access to supplies
 - At a glance, caregivers can see where items are located for quick access
- Lower utility cost because of reduced heat loss
 - Easy visualization means less need to open the door
 - Tempered dual-pane glass helps maintain the interior temperature
- Improved case turnaround and ease of use
 - More efficient inventory management means caregivers have more time for patients

Designed With You In Mind

All of our warming cabinets are engineered to provide:

- Flexible organization and storage
 - Integral adjustable shelves adapt to different sized items or changing inventory levels
- Reliable heating characteristics engineered to provide uniform and efficient heat transfer
- Easy servicing and maintenance
 - Control and heater assemblies are easily accessed from “works-in-a-drawer” trays



Standard solid door single-compartment warming cabinet


Standard glass door single-compartment warming cabinet

Added Features to Advance Patient Care:

We designed our premium warming cabinets to take the worry out of providing warm supplies. Enhancements include:

- Digital data recording: easy-access USB connection, located adjacent to the control panel, allows you to
 - Quickly download stored temperature data (in F° or C°) for easier record maintenance
 - Eliminate manual monitoring of the temperature displayed on the unit
 - Fully comply with healthcare guidelines
- Keyless locking capability: easy-to-use electric door locks
 - Provide digital security to prevent inventory loss
 - Take the worry out of not having keys close by when needed

Electronic data recording provides reports that include date and time, temperature setting, actual temperature, door status, over-temp status and under-temp status. User can wait up to twelve months between downloads.

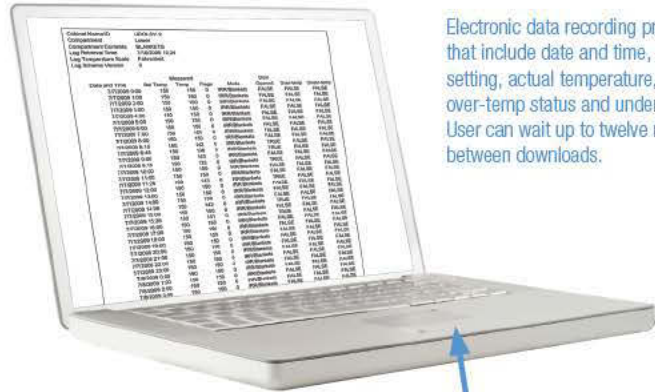

Dual-pane tempered glass doors provide instant visual confirmation of supplies.



On single compartment models, the keypad and USB port are integrated into the control panel.



On dual compartment models, the electric door lock feature will unlock both upper and lower compartments simultaneously. Key lock assures access in the event of a power failure.



Two slide-out baskets for fluid storage are included with mid-size cabinet



Blanket storage shelf (left), also included, can be mixed with basket (far left) to hold both fluids and blankets

New Mid-Size Single Compartment Warming Cabinet with premium control: digitally controlled warming in a size that fits your needs

- Same temperature control features as full-size models
- Glass doors are standard on mid-size model
- Counter height unit can be freestanding or installed under a counter (or recessed)
- Control panel includes electronic data recording and keypad door locking
- Optional mobile base (with bumpers) provides more flexibility
- 7.2 cubic feet of warm storage
- Freestanding unit: 30 wide x 27 1/8" deep x 36 3/8" h (762 x 689 x 924 mm)
- Mobile unit: 30 wide x 30 3/4" deep x 40 3/4" h (762 x 781 x 1035 mm)



Sturdy locking casters improve cleaning access



Built-in full perimeter rubber bumpers protect unit (and facility walls)



The mobile base option, available on 24" deep dual-compartment premium and mid-size models, provides added flexibility

Evidence-based Design

STERIS's research into actual operating room procedures is incorporated into the design of these OR storage modules.



Integrated warming cabinet features convenient digital control technology and is available with optional electric door locks and electronic data recording to meet your OR needs.



Full Day's Work

Our storage consoles provide:

- Complete storage for a full schedule
- Instant access to supplies and equipment to minimize procedural delays
- Protection of your sterile supplies behind closed doors

Exactly What You Need

- Modules can be recessed or freestanding to adjust to space and cost constraints
- Easy-to-clean surfaces include either premium stainless steel or tempered glass doors on all sections
- Dimensions, fittings and arrangements are precisely designed for proper and efficient storage of costly surgical equipment

The Organization Solution

Our project design managers will help you design and configure the optimal storage configuration to match your space requirements and address your current and future OR needs.

Integrated Warming Cabinet

Amsco Warming Cabinets combine with OR Storage Consoles for a sleek, integrated and organized storage space

- Precise and convenient digital control technology
- Stainless steel doors and cabinets for durability
- Electronic data recording and electric door locks are available options





Standard rose spray head with optional eye wash



Optional laminar flow head with optional eye wash



Optional infra-red sensor (left) Temperature control knob (right)

Hands Down – the Most Convenient Sink

- Hands-free water control with the optional infra-red sensor
- Hands-free soap – 2 cc. of soap are released with each push of the foot pump accessory
- Two different head options to meet individual preferences:
 - Standard "rose" spray head produces a showerhead type pattern without aerating the water
 - Optional laminar flow head delivers a consistent stream of water that has a non-splash characteristic
- Unique eye-wash station - this faucet attachment provides convenient OR access to an emergency eye wash station
 - When water is turned on with knee panel, one pull of the center knob releases both orange safety caps to provide instant eye flushing*
 - When knob is not activated, faucet functions as a scrub sink



Stands up to Repeated Washings

- Easy cleaning – clean design has continuous welded compartments and covered corners constructed entirely of stainless steel
- Low maintenance – the stainless steel base is powder-coated for durability

Reassuring Safety

- Timed scrubbing – the optional digital timer helps ensure adequate scrubbing time for optimal decontamination of hands
- Optimum water temperature – the built-in thermostatically controlled mixing valve provides water temperatures of up to 115° F (46° C)
- Optional foot pump soap dispenser accessory helps eliminate cross-contamination issues



Single-station sink shown with foot pump soap dispenser accessory

Amsco® Warming Cabinets Specifications

Available Models	Single Compartment		Dual Compartment		OR Storage Warming Cabinet		Mid-Size Single Compartment
	Standard	Premium	Standard	Premium	Standard	Premium	Premium
Door Options	Steel or dual-pane tempered glass front	Steel or dual-pane tempered glass front	Steel or dual-pane tempered glass front	Steel or dual-pane tempered glass front	Steel front	Steel front	Dual-pane tempered glass front
Installation	Freestanding or recessed	Freestanding or recessed	Freestanding or recessed	Freestanding or recessed	Freestanding or recessed	Freestanding or recessed	Freestanding or recessed
Outside Dimensions (H x W x D) 18" Depth	24 ¼ x 30 x 20 ½" (616 x 762 x 521 mm)		74 ¾ x 30 x 20 ½" (1899 x 726 x 521 mm)		60 x 30 x 18" (1524 x 762 x 457 mm)		N/A
Outside Dimensions (H x W x D) 24" Depth	24 ¼ x 30 x 26 ½" (616 x 762 x 673 mm)		74 ¾ x 30 x 26 ½" (1899 x 762 x 673 mm)		N/A		36 3/8 x 30 x 27 1/8" (924 x 762 x 689 mm)
Inside Dimensions (H x W x D) 18" Depth	13 ½ x 24 x 16 7/8" (343 x 610 x 429 mm)		Upper Chamber 13 ½ x 24 x 16 7/8" (343 x 610 x 429 mm)		N/A		N/A
			Lower Chamber 36 ½ x 24 x 16 7/8" (927 x 610 x 429 mm)		N/A		N/A
Inside Dimensions (H x W x D) 24" Depth	13 ½ x 24 x 22 7/8" (343 x 610 x 581 mm)		Upper Chamber 13 ½ x 24 x 22 7/8" (343 x 610 x 581 mm)		N/A		22 ¾ x 24 x 22 7/8" (578 x 610 x 581 mm)
			Lower Chamber 36 ½ x 24 x 22 7/8" (927 x 610 x 581 mm)		N/A		N/A
Mobile Base on 24" Model	N/A	N/A	Optional	Included	N/A	N/A	Optional
Temperature Range	90°F (32°C) to 160°F (71°C)	90°F (32°C) to 160°F (71°C)	90°F (32°C) to 160°F (71°C)	90°F (32°C) to 160°F (71°C)	90°F (32°C) to 160°F (71°C)	90°F (32°C) to 160°F (71°C)	90°F (32°C) to 160°F (71°C)
Door Locking Mechanism	Mechanical	Electronic with mechanical backup	Mechanical	Electronic with mechanical backup	Mechanical	Electronic with mechanical backup	Included
Electronic Data Recording	n/a	Included	n/a	Included	n/a	Included	Included

Amsco® Flexmatic Scrub Sink Specifications

Models	1-station	2-station	3-station
Dimensions (W x D x H)	32 x 27 9/32 x 51 ½" (813 x 692 x 1308 mm)	64 x 27 9/32 x 51 ½" (1626 x 692 x 1308 mm)	96 x 27 9/32 x 51 ½" (2438 x 692 x 1308 mm)
Laminar flow faucet head	optional	optional; both faucets would have same style head	optional; all faucets would have same style head
Eye wash station attachment	optional	optional; can be attached to either left or right faucet	optional; can be attached to any of the three faucets
Infra-red water control	optional	optional	optional
Digital timer	optional	optional	optional
Temperature safety	> 115°F (46°C)	> 115°F (46°C)	> 115°F (46°C)

*Faucet-mounted eye wash stations (regardless of manufacturer) require two motions to operate (turn water on, pull knob) and thus do not meet the provisions of ANSI Z358.1-2004; these are intended as supplemental installations to other dedicated eye wash stations.

Amsco® OR Storage Consoles

Door Options	Stainless steel or tempered glass front
Installation	Freestanding or recessed
Console Components	Surgical Table Accessory Cabinet Miscellaneous Supply Cabinet Warming Cabinet Pass-through Storage Cabinet Desk Unit
Dimensions	24, 36, or 48" w x 18" d x 60" h (warming cabinet component is 30" wide)



STERIS Corporation
5960 Heisley Road
Mentor, OH 44060-1834 • USA
440-354-2600 • 800-548-4873
www.steris.com

